

ISSUE: December 2015

<b>PRODUCT:</b> Permacolour Concrete Sealer Extra  <b>Other Names:</b> Resin Solution  <b>Recommended use of the chemical and restriction on use:</b> Concrete and Masonry coatings.	<b>UN No.</b>	1866
	<b>Dangerous Goods Class:</b>	3
	<b>Subsidiary Risk:</b>	-
	<b>Packing Group:</b>	III
	<b>HAZCHEM:</b>	3 [Y]

Hazardous Nature:	This product is classified as hazardous under HSNO criteria
Exposure Standards:	TEL (air): Not available; TWA : Xylene, 50 ppm, 217 mg/m <sup>3</sup> STEL : Not available
Environmental Standards:	EEL (air) : Not available

**Physical Characteristics (Typical) Section 9 of SDS**

Appearance	Clear colourless liquid
Boiling Point/Range (°C)	136 - 175
Flash Point (°C)	23 - 27
Specific gravity/Density (g/ml @ 15°C)	0.88
Chemical Stability	Stable at room temperature and pressure
Reactivity	Mixing with strong oxidizing agents causes violent reactions.

**Product Ingredients Section 3 of SDS**

Acrylic polymer	various	< 25
Xylene, mixed isomers	1330-20-7	< 73
Naphthalene	91-20-3	0.1 – 1.0
Ethylbenzene	100-41-4	0.1 - 1.0

CONTACT DETAILS


**HEAD OFFICE** 42a Egmont Road, PO Box 7022, New Plymouth, 06 755 3320, info@permacolour.co.nz  
FREEPHONE 0508 444 555

**AUCKLAND WAREHOUSE** Unit 4-16 Zelanian Drive, East Tamaki, Auckland, 09 272 8444, auckland@permacolour.co.nz  
FREEPHONE 0508 666 777

**CHRISTCHURCH OFFICE** 25a Sheffield Crescent, Burnside, Christchurch, PO Box 39148, Harewood, Christchurch, 03 358 9669, christchurch@permacolour.co.nz

**SALES Auckland / Upper North Island** Anthony Kirkhoff, 027 6565 455, anthony@permacolour.co.nz  
**Lower North** Sharon Gore, 027 474 55 77, sharon@permacolour.co.nz

**South Island** Les Hyland, 027 444 5217, les@permacolour.co.nz  
Frank Reynolds, 027 555 1162, christchurch@permacolour.co.nz

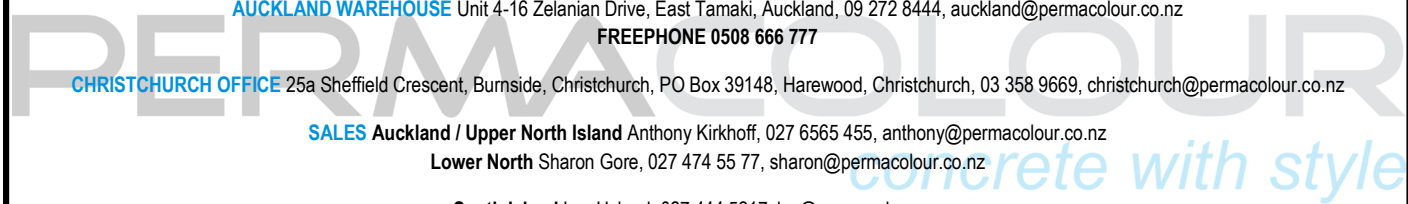

**1. IDENTIFICATION**

**Product Name:** Permacolour Concrete Sealer Extra  
**Other Names:** Resin Soutlion  
**Chemical Family:** Blended polymer solution  
**Molecular Formula:** Not applicable  
**Recommended Use:** Concrete and Masonry coatings.  
**Supplier:** Permacolour by New Zealand Decorative Concrete Supplies  
**Address:** PO Box 7022, New Plymouth 4341  
**Telephone:** 06 755 3320  
**Emergency phone:** 0274446023

**2. HAZARDS INDICATION**

Product is classified as hazardous according to Schedules 1 to 6 of the Hazardous Substances (Minimum Degrees of Hazard) Regulations 2001 of the HSNO Act, 1996.

**HSNO Classifications:** 3.1C, 6.1E, 6.3A, 6.4A, 6.7B, 6.8B, 6.9B, 9.1D

**Signal word:** WARNING

**Hazard Statements :**

**H226:** Flammable liquid and vapour  
**H304:** May be fatal if swallowed and enter airways  
**H320:** Causes eye irritation  
**H306:** May be harmful if swallowed and enters airways  
**H315:** Causes skin irritation  
**H402:** Toxic to aquatic life with long lasting effects.

**Precaution Statements :**

**P210:** Keep away from heat, sparks, open flames and hot surfaces. No smoking.  
**P280:** Wear protective gloves, protective clothing and eye protection  
**P241:** Use explosion-proof electrical, ventilating and lighting equipment  
**P243:** Take precautionary measures  
**P242:** Use only non-sparking tools  
**P103:** Read label before use  
**P201:** Obtain special instructions before use  
**P233:** Keep container tightly closed  
**P264:** Wash thoroughly after handling  
**P260:** Do not breathe vapours  
**P273:** Avoid release to environment  
**P240:** Ground container and receiving equipment against static discharge

**3. COMPOSOTION: Information on ingredients**

Chemical Ingredient	CAS No.	CAS No.
Acrylic polymer	Various	<25
Xylene, mixed isomers	133-20-7	<73
Naphthalene	91-20-3	0.1 - 1.0
Ethylbenzene	100-41-4	0.1 - 1.0

**4. FIRST AID MEASURES**

For advice, contact National Poison Centre (Phone New Zealand: 0800 764 766) or a doctor.

- Swallowed:** If swallowed, do not induce vomiting. Seek immediate medical attention. Begin artificial respiration if the person is not breathing. Use mouth to nose rather than mouth to mouth.
- Skin Contact:** If skin or hair contact occurs, remove contaminated clothing and flush affected area with large amounts of water then wash with soap and water.
- Eye Contact:** Hold eyelids apart and flush the eye continuously with running water. Continue flushing for at least 15 minutes. Get medical attention if irritation persists.
- Inhalation:** Move the victim to fresh air immediately. Keep warm and at rest. Begin artificial respiration if breathing has stopped. Use mouth to nose rather than mouth to mouth. Seek immediate medical attention.
- First Aid facilities:** Provide eye baths and safety showers close to areas where splashing may occur.

**Medical Attention:** Treat according to symptoms. Avoid gastric lavage: risk of aspiration of product to lungs with the potential to cause chemical pneumonitis. General measures should be taken to control acidosis and maintain urine output.

**5. FIRE FIGHTING MEASURES**

Shut off product that may 'fuel' a fire if safe to do so. Allow trained personnel to attend a fire in progress, providing fire-fighters with this Safety Data Sheet. Prevent extinguishing media from escaping to drains and waterways.

- Suitable extinguishing media :** Dry chemical or foam
- Hazards from combustion products:** Carbon dioxide and carbon monoxide
- Precautions for fire fighters and special protective equipment:** Full protective clothing and self-contained breathing apparatus
- Hazchem Code:** 3[Y]

**6. ACCIDENTAL RELEASE MEASURES**

Prevent fluid from escaping to drains and waterways. Contain leaking packaging in a containment drum. Prevent vapours from building up in confined areas. Ensure that drain valves are closed at all times. Clean up and report spills immediately.

**Methods and materials for containment *Major Land Spill***

- Eliminate sources of ignition.
- Warn occupants of downwind areas of possible fire and explosion hazard.

**6. ACCIDENTAL RELEASE MEASURES CONTINUED**

- Prevent liquid from entering sewers, watercourses, or low-lying areas.
- Keep the public away from the area.
- Shut off the source of the spill if possible and safe to do so.
- Advise authorities if substance has entered a watercourse or sewer or has contaminated soil or vegetation.
- Take measures to minimize the effect on the ground water.
- Contain the spilled liquid with sand or earth.
- Recover by pumping – use explosion proof pump or hand pump – or with a suitable absorbent material.
- Consult an expert on disposal of recovered material and ensure conformity to local disposal regulations.
- See “First Aid Measures” and “Stability and Reactivity”

**Major Water Spill**

- Eliminate any sources of ignition.
- Warn occupants and shipping in downwind areas of possible fire and explosion hazard.
- Notify the port or relevant authority and keep the public away from the area.
- Shut off the source of the spill if possible and safe to do so.
- Confine the spill if possible.
- Remove the product from the surface by skimming or with suitable absorbent material.
- Consult an expert on disposal of recovered material and ensure conformity to local disposal regulations.

See “First Aid Measures” and “Stability and Reactivity”.

**7. HANDLING AND STORAGE**

**Precautions for safe handling:** This product is flammable. Do not open near open flame, sources of heat or ignition. No smoking. Keep container closed. Handle containers with care. Open slowly to control possible pressure release. Material may accumulate static discharge. Use grounding leads to avoid discharge (electrical spark).

**Conditions for safe storage:** Store in a cool, dry place away from direct sunlight. Do not pressurize, cut, heat or weld containers - residual vapours are flammable. This product is flammable and will fuel a fire in progress.

**Incompatible materials:** Natural Rubber, Butyl and Nitrile Rubber, Neoprene

**8. EXPOSURE CONTROLS: PERSONAL PROTECTION**

**Health Exposure Standards:** The following Tolerable Exposure Limit (TEL) Workplace Exposure Standards (WES), 2002 have been set by the Occupational Safety and Health Service , NZ Department of Labour for components in this substance:

	<b>WES-TWA</b>	<b>WES-STEL</b>
<b>Xylene</b>	50 ppm	217 mg/m <sup>3</sup>
<b>Naphthalene</b>	10 ppm	52 mg/m <sup>3</sup>

**8. EXPOSURE CONTROLS: PERSONAL PROTECTION CONTINUED**

Manufacturers recommendation for product : TWA 350 mg/m<sup>3</sup> (80 ppm), STEL 543 mg/m<sup>3</sup> (125 ppm).

**Biological limit values :** Biological Exposure Index (BEI) – 1.5 g/g creatinine at end of shift.

**Ventilation:** The use of local exhaust ventilation is recommended to control process emissions near the source. Laboratory samples should be handled in a fume hood. Provide mechanical ventilation of confined spaces. Use explosion-proof ventilation equipment.

**Personal Protective Equipment:**

**Respiratory Protection:** Where concentrations in air may exceed the limits described in the Health Exposure Standards, it is recommended to use a half-face filter mask to protect from over-exposure by inhalation. A type "A" filter material is considered suitable for this product.

**Eye Protection:** Always use safety glasses or a face shield when handling this product.

**Skin/ Body Protection:** Always wear long sleeves and long trousers or coveralls, and enclosed footwear or safety boots when handling this product. It is recommended that chemical resistant gloves be worn when handling this product.

**9. PHYSICAL AND CHEMICAL PROPERTIES**

PROPERTY	UNIT OF MEASUREMENT	TYPICAL VALUE
Appearance	-	Clear colourless liquid
Boiling Point/Range	°C	136-175
Flash Point	°C	23-27
Density at 15°C	g/ml	0.88
Vapour Pressure at 20°C	Mm Hg	12.4
Vapour Density at 20°C	kPa	Not available
Auto ignition Temperature	°C	432-530
Explosive Limits In Air	%	1.2-8.6
Viscosity	cSt	Not available
Volatiles	%	100
Solubility in Water	% w/w	Negligible

The values listed are indicative of this product's physical and chemical properties. For a full product specification, please consult the Product Data Sheet.

**10. STABILITY AND REACTIVITY**

**Chemical Stability:** Stable at room temperature and pressure.

**Conditions to avoid:** Sources of heat and ignition, open flames.

**Hazardous decomposition products:** No decomposition products except on burning. See "Fire Fighting Measures".

**Hazardous reactions:** Mixing with strong oxidising agents causes violent reactions.

**11. TOXICOLOGICAL INFORMATION****Acute Effects**

- Ingestion:** Small amounts of liquid aspirated into the lungs during ingestion or from vomiting, may cause chemical pneumonitis, or pulmonary oedema. Ingesting any amount of this product will result in headaches, nausea, dizziness, and tracheal burning.
- Eye Contact:** This product will be irritating to eyes resulting in redness and swelling with a burning sensation and blurred vision.
- Skin Contact:** Harmful in contact with skin. Symptoms include a burning sensation, redness, swelling and possible blistering.
- Inhalation:** Product is harmful by inhalation. The inhalation of vapours will cause dizziness and drowsiness. There is a possibility of organ damage over prolonged use or exposure. Central nervous system depression includes nausea, headaches, dizziness and possibly loss of consciousness.

**Chronic Effects**

This product contains naphthalene at 0.1 – 1.0%. IARC evaluated naphthalene and concluded that there was sufficient evidence for carcinogenicity in experimental animals, but inadequate evidence for cancer in exposed humans. Accordingly, IARC classified naphthalene as a possible human carcinogen (Group 2B). ERMA NZ have classified naphthalene as being a 6.7B; suspected human carcinogen. Ethylbenzene is classified by ERMA as a 6.7B, suspected human carcinogen.

ERMA NZ have classified naphthalene, xylene and ethylbenzene as being a 6.9B classification; may cause damage to organs and systems.

**Other Health Effects Information:**

Persons with pre-existing liver, kidney, central nervous system or skin complaints should avoid unnecessary exposure to this product. Every effort should be made to protect eyes, respiratory tract and skin from exposure should be taken under these circumstances.

**Toxicological Information:**

<b>Xylene</b>	Oral, LD50 (mouse)	1590 mg/kg
	Inhalation, LC50 (rat)	27.6 mg/L (as vapour)
<b>Naphthalene</b>	Oral LD50 (rat)	490 mg/kg
	Dermal LD50 (rat)	1120 mg/Kg

**12. ECOLOGICAL INFORMATION****Ecotoxicity:**

- Aquatic toxicity:** Product is harmful. Long term adverse effects to aquatic organisms are possible if continuous exposure is maintained.
- Persistence/degradability:** This product is likely to biodegrade on exposure to weathering and UV radiation. There is no data available to be able to classify as biodegradable.

**Mobility:**

This product may be mobile in soil but is not miscible in water.

<b>Environmental Exposure Standards:</b>	EEEL (WATER):	Not set
	EEL (SOIL)	Not set
	EEL (SEDIMENTS)	Not set

**13. DISPOSAL CONSIDERATIONS**

**Disposal Methods:** Empty packaging should be taken for recycling, recovery or disposal through a suitably qualified or licensed contractor. Care should be taken to ensure compliance with national and local authorities. Packaging may still contain fumes and vapours that are Flammable and harmful. Ensure that empty packaging is allowed to dry.

**Special Precautions  
for Landfill or  
Incineration:**

This product is NOT suitable for disposal by either landfill or via municipal sewers, drains, natural streams or rivers. This product is ash less and can be burned directly in appropriate equipment.

**14. TRANSPORT INFORMATION**

UN No.	1866	UN No.	1866	UN No.	1866
Proper Shipping Name	Resin Solution	Proper Shipping Name	Resin Solution	Proper Shipping Name	Resin Solution
DG Class	3	DG Class	3	DG Class	3
Sub. Risk		Sub. Risk		Sub. Risk	
Pack Group	III	Pack Group	III	Pack Group	III
Hazchem	3[Y]	Hazchem	3[Y]		

*concrete with style*

**Dangerous Goods Segregation**

This product is classified as a Dangerous Good Class 3, Packing Group III.

Please consult the Land Transport Rule: Dangerous Goods 2005, and NZS 5433:2007 Transport of Dangerous Goods on Land for information.

**15. REGULATORY INFORMATION**

**Country/ Region:** New Zealand

**Inventory:** NZCIL

**Status:** Listed

**ERMA New Zealand Approval Code:** HSR002502 Additive, Process Chemicals and Raw Materials (Flammable, Toxic [6.7]) Group Standard, 2006

**HSNO Controls:** Codes: F1, F2, F3, F5, F6, F11, F12, F14, F16, F17, T1, T2, T3, T4, T5, T6, T7, T8, E1, E2, E6, E8, P1, P3, P5, PI3, P15, PG3, D2, D4, D5, D6, D7, D8, EM1, EM4, EM6, EM7, EM8, EM9, EM10, EM11, EM12, EM13, I1, I3, I5, I8, I9, I11, I13, I16, I17, I18, I19, I21, I23, I25, I28, I29, I30, AH1, GN35A.

**Refer [www.ermanz.govt.nz](http://www.ermanz.govt.nz) for information on Controls.**

**16. OTHER INFORMATION****Reasons for Issue:**

Updating HSNO classifications. Replaces Safety Data Sheet dated 29 October, 2007.

**Abbreviations:**

CAS Number: Chemical Abstracts Number

IARC: International Agency for Research on Cancer

NIOSH: National Institute of Occupational Safety & Health

NOHSC: National Occupational Health and Safety Council

NZCI: New Zealand Chemical Inventory

REL: Recommended Exposure Limits

The information sourced for the preparation of this document was correct and complete at the time of writing to the best of the writer's knowledge. The document represents the commitment to the company's responsibilities surrounding the supply of this product, undertaken in good faith. This document should be taken as a safety guide for the product and its recommended uses, but is in no way an absolute authority. Please consult the relevant legislation and regulations governing the use and storage of this type of product. For further information, please contact Permacolour by New Zealand Decorative Concrete.

